



銷德科技股份有限公司

ET&T Technology Co., Ltd

台北市中山區(104)松江路101號6樓

6F., No.101, Songjiang Rd., Taipei City 104, Taiwan (R.O.C.)

Tel : 886-2-2506-9472 Fax : 886-2-2501-6877 E-Mail : info@etandt.com.tw

PRODUCT DATA SHEET

Title: Resistive Touch Panel Controller (4 wire USB type)	Doc ID	Date 2011/03	Ver. 3.2
	Product TC4UF		

Description

TC4UF is a resistive touch panel controller for **USB** port and is able to be used with **4-wire** analog resistive panel. It is with drivers supporting many kinds of operation systems such as Windows, Linux and Macintosh.

Specification

Resolution :	4096 x 4096 (ADC 12 bit)
Touch Panel :	4-wire
Interface :	USB 1.1
LED :	Touch / un-touch indication
Power :	Derived form USB port
Power consumption :	30mA / 5V typical
Respond time :	10ms (100 rps)
Dimension :	PCB 65 x 22 mm
Connector Type :	Wafer / FPC
Operation Temperature :	-20°C ~ 80°C
Storage Temperature :	-40°C ~ 125°C
Regulatory Approvals :	CE,FCC,BSMI

Figure : Photo of controller board:



PRODUCT DATA SHEET

Title: Resistive Touch Panel Controller (4 wire USB type)	Doc ID	Date 2011/03	Ver. 3.2
	Product TC4UF		

Interface Specifications

Interface for Host side :

J3 : For USB connector

2.00mm Wafer 90° Type

Pin No.	Specifications
1	VCC
2	D-
3	D+
4	GND
5	Frame Ground


Interface for Touch Panel side :

J1 : For Panel connector

1.00mm FPC SMD Side Entry Type

Pin No.	Specifications
1	Lower
2	Left
3	Upper
4	Right

Figure : Size of controller board

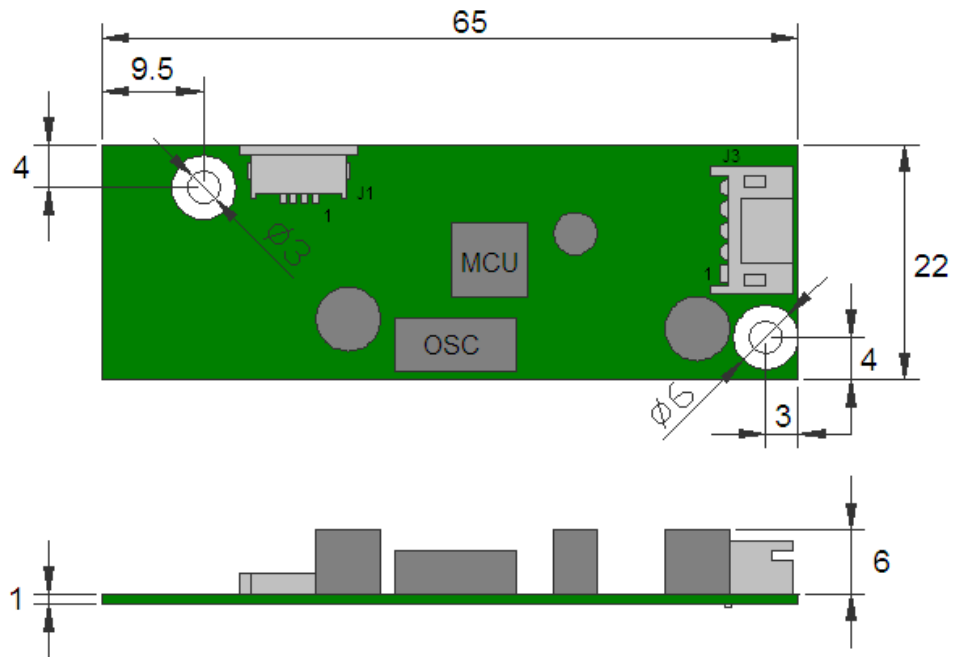

Unit : mm