

PRODUCT SPECIFICATION

A

A

1. PRODUCT: TOUCH PANEL

2. PART NUMBER: **TTI**: T010-1301-T170R ④

:

3. ATTACHED DRAWING: Tech Bes TTI-03017

TOUCH PANEL SPECIFICATION DOCUMENT No.

B

B

SIGNATURE FOR YOUR RECEIPT

DATE:

C

C

TRANSTOUCH TECHNOLOGY INC. (TTI)
DOCUMENT No.: TTI PRODUCT TECHNOLOGY Dept.

D

D

MANAGER: _____ DATE: _____

TTI PRODUCT TECHNOLOGY Dept.
3F No.50 Hwa-Ya 3rd Road,Kwei-san Shian Tao-yuan ,Taiwan
TEL:(03)3978800 FAX:(03)3978855

PROPRIETARY NOTE

This document contains information confidential and proprietary to TRANSTOUCH TECHNOLOGY INC. (TTI) and shall not be reproduced or transferred to other documents or disclosed to other or used for any purpose other than for witch it was obtained without the expressed written consent of TRANSTOUCH TECHNOLOGY INC. (TTI)

E

DATE
DOCUMENT CONTROL SECTION

04	20050824	崔岱安		Change to lead free	TITLE: TOUCH PANEL SPEC.	
03	20040528	郭信杰		外觀仕様變更	DRAW NO. Tech Bes TTI-03017	CUST
02	20040427	郭信杰		玻璃缺角規範變更 松田		
EDIT	DATA	DESIG	CHECK	DESCRIPTION	富晶通科技股份有限公司	
DESIGN	20030425	陳致富	CHECK		TRANSTOUCH TECHNOLOGY INC	SHEET 1/14

F

1

2

3

4

A

A

B

B

C

C

D

D

E

F

觸控面板製品規格書
TOUCH PANEL SPECIFICATION

富晶通科技股份有限公司
TRANSTOUCH TECHNOLOGY INC

www.szlongsun.net
www.szlongsun.net

DATE	DOCUMENT CONTROL SECTION
------	--------------------------

04	20050824	崔岱安		Change to lead free	TITLE: TOUCH PANEL SPEC.	
03	20040528	郭信杰		外觀仕様變更	DRAW NO. Tech Bes TTI-03017	CUST
02	20040427	郭信杰		玻璃缺角規範變更 松田		
EDIT	DATA	DESIG	CHECK	DESCRIPTION	富晶通科技股份有限公司	SHEET 2/14
DESIGN	20030425	陳致富	CHECK		TRANSTOUCH TECHNOLOGY INC	

觸控面板製品規格書
TOUCH PANEL SPECIFICATION

1. 適用範圍 Application

此規格書是適用富晶通科技股份有限公司所製作的觸控面板。

This specification is applied to TOUCH PANEL made by
TRANSTOUCH TECHNOLOGY INC. (TTI)。

【製品圖號 手配圖號 Product No.】

品名 Name	製品圖號 P/No.	備註 Remark
觸控面板 TOUCH PANEL	T010-1301-T170R ④	8.4" 筆/指輸入兼 For pen & finger input RoHS ④

2. 概要 Function

此製品是裝置在 LCD 等平面顯示器上使用電阻薄膜的觸控面板。以先端有小 R 的筆或是以手指按下觸控面板的表面，觸控面板的電壓會透過檢出迴路將座標值檢測出來。

TTI TOUCH PANEL is resistance type that customer uses with flat display like LCD. Once operator touches it by resin PEN with round end or FINGER, The circuit for TOUCH PANEL sends coordinate point to PC from voltage at contact point.

3. 製造者 MANUFACTURER

富晶通科技股份有限公司 TRANSTOUCH TECHNOLOGY INC. (TTI)

所在地:桃園縣龜山鄉(華亞科技園區)華亞三路 50 號 3 樓

Address:3F No.50 Hwa-Ya 3rd Road ,Kwei-san Shian Tao-yuan ,Taiwan

4. 外型 OUTSIDE

4.1 外型圖 DRAWING

參考最後附加圖面

Please refer the last page of this spec.

DOCUMENT CONTROL SECTION
DATE

04	20050824	崔岱安		Change to lead free	TITLE: TOUCH PANEL SPEC.	
03	20040528	郭信杰		外觀仕様變更	DRAW NO. Tech Bes TTI-03017	CUST
02	20040427	郭信杰		玻璃缺角規範變更 松田		
EDIT	DATA	DESIG	CHECK	DESCRIPTION		富晶通科技股份有限公司
DESIGN	20030425	陳致富	CHECK		APPR 松田	TRANSTOUCH TECHNOLOGY INC
						SHEET 3/14

4.2 用語定義 Defines of words

用語 Words	定義 Defines
動作保證範圍 Guaranteed active area	觸控面板的特性保證範圍。 Area to be guaranteed all characteristics stated on this spec.
上蓋邊界 Boundary line of top enclosure	表示上蓋外框的建議位置。 Recommended boundary line of top enclosure
透明範圍 View (transparent) area	雙面膠或是從電極內側的透明範圍。 View area which is inside adhesive zone or electrode pattern. Top enclosure must not be fixed by this area.
誤輸入防止範圍 Anti-input area	在透明絕緣的範圍上，防止上蓋邊緣的誤觸動區域 Area to protect miss-input when top enclosure edge touches the touch panel.

5. 特性 Characteristics

5.1 光學特性 Optical characteristics

	項目 ITEM	規格 SPECIFICATION	備註 REMARKS
1	全光線透過率 TRANSPARENCY	82% TYP. (動作保證範圍內) (Inside of guaranteed active area.)	JIS K-7105
2	HAZE	5.0% TYP.	

5.2 環境特性 Environmental characteristics

	項目 ITEM	規格 SPECIFICATION	備註 REMARKS
1	動作溫度 Operation temperature	-5°C ~60°C	Max.wetTemp.is38°C (No dew)
2	保存溫度 Storage temperature	-20°C ~70°C	
3	動作濕度 Operation Humid.	20~90% RH	
4	保存濕度 Storage temperature	10~90% RH	

DOCUMENT CONTROL SECTION
DATE

04	20050824	崔岱安	Change to lead free	TITLE: TOUCH PANEL SPEC.	
03	20040528	郭信杰	外觀仕様變更	DRAW NO. Tech Bes TTI-03017	
02	20040427	郭信杰	玻璃缺角規範變更 松田		CUST
EDIT	DATA	DESIG	CHECK	DESCRIPTION	富晶通科技股份有限公司 TRANSTOUCH TECHNOLOGY INC
DESIGN	20030425	陳致富	CHECK	APPR 松田	SHEET 4/14

5.3 機械特性 Mechanical characteristics

項目 ITEM	規格 SPECIFICATION	備註 REMARKS
1 表面硬度 Hardness of surface	鉛筆硬度 3H 以上 Pencil hardness 3H min.	JIS K-5400
2 FPC 剝離強度 FPC peeling strength	5N 以上 5N Min	向上垂直剝離 Peeling upward by 90°
3 入力荷重 Operation force	筆 Pen	動作保證範圍內(不包含 Dot 上方) Within" guaranteed active area" (Not include above the Dot)
	指 Finger	

5.4 電氣特性 Electrical characteristics

項目 ITEM	規格 SPECIFICATION	備註 REMARKS
1 額定電壓 Rated Voltage	DC 7V max.	
2 電極間電阻 Resistance	X axis : 300Ω ~ 1000Ω (GLASS 側)	FPC 連接端測量 At connector
	Y axis : 100Ω ~ 600Ω (FILM 側)	
3 直線性 Linearity	MAX : 1.5% 「最初值」 「initial value」 MAX : 3.0% 「環境及壽命試驗後」 「after environmental & life test」	測定條件請參照註 1 Refer Note-1
4 CHATTERING	10ms 以下 max At connector pin	5Hz 測定方式同 6.1 項 Condition: same as 6.1 as stated
5 絕緣電阻 Insulation Resistance	20MΩ 以上 (DC 25V)	
	20MΩ min (DC 25V)	

註 1: Note-1


直線性測定條件

Measurement condition of Linearity

DOCUMENT CONTROL SECTION
DATE

04	20050824	崔岱安	Change to lead free	TITLE: TOUCH PANEL SPEC.
03	20040528	郭信杰	外觀仕様變更	DRAW NO. Tech Bes TTI-03017
02	20040427	郭信杰	玻璃缺角規範變更 松田	CUST
EDIT	DATA	DESIG	CHECK	DESCRIPTION
DESIGN	20030425	陳致富	CHECK	富晶通科技股份有限公司 TRANSTOUCH TECHNOLOGY INC

在動作保證範圍內，沿著 X、Y 各軸的直線上任意複數點將最外端的點連結成一假想直線，相對於此線的偏差值。直線性是基準電壓分割值得最大偏差電壓。
 Difference between actual voltage & theoretical voltage is an error at any points. Linearity is the value max.
 Error voltage divided by voltage difference on active area.

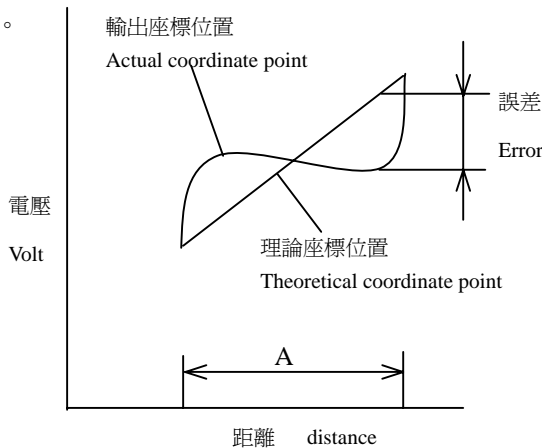

6. 耐久性 life test condition


6.1 機械特性 Mechanical characteristics

1	筆寫壽命 Notes life	10 萬字以上 10 ⁵ words min	動作保證範圍內 Within "guaranteed active area"
2	打點壽命 Input life	100 萬回以上 10 ⁶ times min	動作保證範圍內 Within "guaranteed active area"

※ 入力荷重測定條件

Measurement condition of operation force

按下 film 表面，X 軸 Y 軸間的電阻值在 2kΩ 以下時所測得の入力荷重。
 Resistance between X & Y axis must be equal or lower than 2kΩ (R_{on} ≤ 2kΩ)。

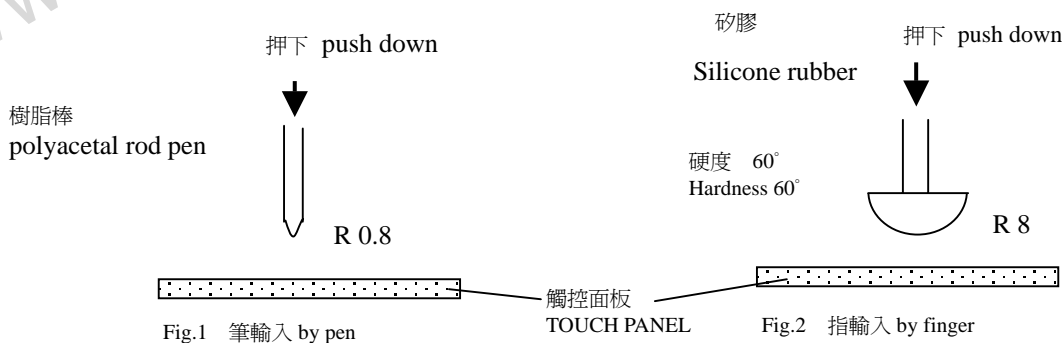

DOCUMENT CONTROL SECTION

DATE

04	20050824	崔岱安	Change to lead free	TITLE: TOUCH PANEL SPEC.	
03	20040528	郭信杰	外觀仕様變更	DRAW NO. Tech Bes TTI-03017	
02	20040427	郭信杰	玻璃缺角規範變更 松田		CUST
EDIT	DATA	DESIG	CHECK	DESCRIPTION	富晶通科技股份有限公司 TRANSTOUCH TECHNOLOGY INC
DESIGN	20030425	陳致富	CHECK	APPR 松田	

※ 筆寫壽命(耐久性)試驗條件
Notes life test condition (by pen)

在動作保證範圍內以任意 A.B.C...7.5 ×6.75mm 大小的文字在 10 ×9mm 大小區域中，以下記的筆連續書寫。

Notes area for pen notes life test is 10×9mm. Size of word is 7.5×6.75mm.


Word is any A.B.C..., word. Center of each word is changed at random in notes area.

- 筆尖端 Shape of pen end : R 0.8 (Refer Fig.1)
- 筆材料 Materials of pen : Polyacetal
- 入力荷重 Load : 250g

【 判定基準 judge base 】

關於入力荷重、絕緣電阻、電極間電阻需滿足 5.3,5.4 的特性

Operation force, Insulation resistance & Resistance stated before as 5.3 and 5.4 must be within spec.

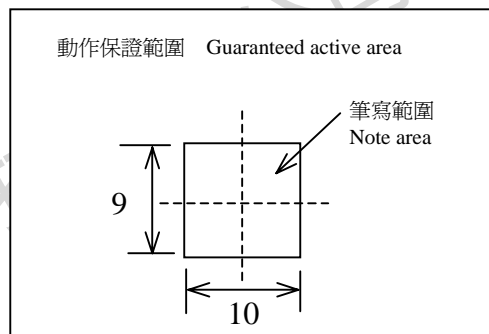

※打點壽命(耐久性) 試驗條件 Input life test condition(by finger)

使用矽膠在同一地方連續打點

Tapping same point by silicone rubber.

- 橡膠尖端 Sharp of rubber end : R8 硬度 Hardness 60°(Refer fig.2)
- 操作力 Load : 200g
- 操作頻率 frequency : 5Hz

【 判定基準 judge base 】

關於入力荷重、絕緣電阻、電極間電阻需滿足 5.3 , 5.4 的特性

Operation force, Insulation resistance & Resistance stated before as 5.3 & 5.4 must be within spec.

DATE DOCUMENT CONTROL SECTION ↑


04	20050824	崔岱安		Change to lead free	TITLE: TOUCH PANEL SPEC.	
03	20040528	郭信杰		外觀仕様變更	DRAW NO. Tech Bes TTI-03017	CUST
02	20040427	郭信杰		玻璃缺角規範變更 松田		
EDIT	DATA	DESIG	CHECK	DESCRIPTION		富晶通科技股份有限公司
DESIGN	20030425	陳致富	CHECK		APPR 松田	TRANSTOUCH TECHNOLOGY INC

6.2 環境測試條件 Environmental test condition

	項目 ITEM	規格 SPECIFICATION	備註 REMARKS
1	高溫試驗 High temperature	70°C , 240 hr(2hr after test)	關於入力荷重、絕緣電阻、電極間電阻需滿足 5.3 , 5.4 的特性 Operation force, Insulation resistance & Resistance stated before as 5.3, 5.4 must be within spec.
2	低溫試驗 Low temperature	-20°C , 240 hr(2hr after test)	
3	高濕試驗 Humidity	40°C , 95% RH , 240hr (24hr after test)	

7 · 外觀規格 Appearance.

7.1 外觀基準適用領域(範圍) Scope of reject criteria.

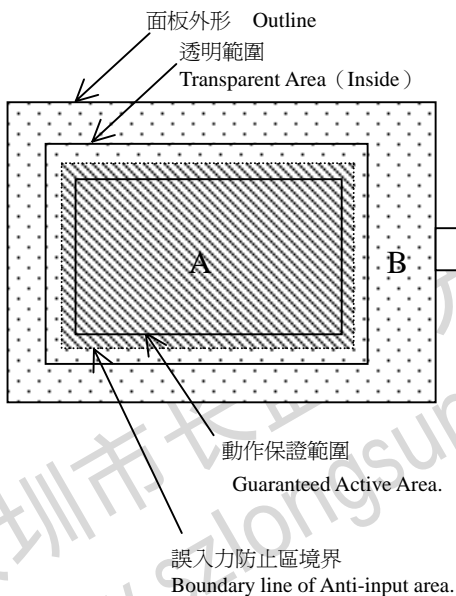

領域 Area	外觀仕様 Spec.
A	使用上不會有可視的缺失而影響正常操作。檢查基準依據 7-2 項。 Without any defect point to effect on normal operation.
B	不檢查 None-specify.

A : 誤入力防止區境界(波浪狀)的內側區域
Inside of Boundary Line of Anti-input area.
(Wavy-pattern)

B: 領域 A 以外
Without A area. Input area refers to drawing as left.

DOCUMENT CONTROL SECTION
DATE

04	20050824	崔岱安	Change to lead free	TITLE: TOUCH PANEL SPEC.	
03	20040528	郭信杰	外觀仕様變更	DRAW NO. Tech Bes TTI-03017	
02	20040427	郭信杰	玻璃缺角規範變更 松田		CUST
EDIT	DATA	DESIG	CHECK	DESCRIPTION	富晶通科技股份有限公司 TRANSTOUCH TECHNOLOGY INC
DESIGN	20030425	陳致富	CHECK	APPR 松田	SHEET 8/14

1

2

3

4

7.2 檢查基準 Reject criteria.

項目 Description		檢查基準 Reject criteria		
FILM 打痕(魚眼) Film fish eye	Area	$0.1\text{mm}^2 \leq S$: To be zero ③	
	Area	$0.05\text{mm}^2 \leq S < 0.1\text{mm}^2$: To be max 5- 3 points	
	Area	$S < 0.05\text{mm}^2$: None-specify	
FILM 刮傷 Film dent	Area	$0.1\text{mm}^2 \leq S$: To be zero ③	
	Area	$0.05\text{mm}^2 \leq S < 0.1\text{mm}^2$: To be max 5- 3 points	
	Area	$S < 0.05\text{mm}^2$: None-specify	
玻璃/FILM 間異物 Foreign material between glass & film	點狀異物 Dot type	Area	$0.1\text{mm}^2 \leq S$: To be zero ③
		Area	$0.05\text{mm}^2 \leq S < 0.1\text{mm}^2$: To be max 5- 3 points
		Area	$S < 0.05\text{mm}^2$: None-specify.
	線狀異物 Line type	Width	$0.1\text{mm} \leq W$: To be zero
Width		$0.03\text{mm} \leq W < 0.1\text{mm}$ with length $L < 10-5\text{mm}$: To be max 5- 3 points ③	
Width		$W < 0.03\text{mm}$: None-specify	
線傷 Scratch	Width	$0.1\text{mm} \leq W$: To be zero	
	Width	$0.03\text{mm} \leq W < 0.1\text{mm}$ with length $5\text{mm} \leq L \leq 10-5\text{mm}$: To be max 5- 3 points ③	
	Width	$W < 0.03\text{mm}$: None-specify	
牛頓環 Newton ring	在螢光燈(700Lux 以上)下, 目視(距 Touch Panel 20~30 cm) 判斷 5~10 秒無牛頓環, 但是在同一條件之下從玻璃面所見的牛頓環不在規範內。 Not seen from PANEL film side under fluorescent lamp (700Lux up), exclude from PANEL glass side. (Distance 20~30cm from eyes to Touch Panel)			

< 檢查位置 >

※ S = 面積, W = 寬、幅, L = 長,

DOCUMENT CONTROL SECTION

DATE


04	20050824	崔岱安		Change to lead free	TITLE: TOUCH PANEL SPEC.	
03	20040528	郭信杰		外觀仕様變更	DRAW NO. Tech Bes TTI-03017	CUST
02	20040427	郭信杰		玻璃缺角規範變更 松田		
EDIT	DATA	DESIG	CHECK	DESCRIPTION	富晶通科技股份有限公司	
DESIGN	20030425	陳致富	CHECK	APPR 松田	TRANSTOUCH TECHNOLOGY INC	SHEET 9/14

2001.7 PTD-0001-1

製造批號 Production Lot No. ④	雷射打印於 Film 面 05010001	前兩碼(1, 2 碼)為年份(05: 2005 年); 年份後兩碼(3, 4 碼)為月份(01: 1 月); 其他碼(5~8 碼)為流水號	製造批號 Production Lot No.
---------------------------------	------------------------------	---	----------------------------

9. 注意事項 Attention

- (1) 本產品是使用玻璃所製，因為玻璃的邊、角是銳利的，在使用觸控面板時請多注意。
在使用觸控面板時請戴手套作業。
Since touch panel is consist of Glass, Pls. be careful your hand and other part from injury at handling. You must wear gloves at handling.
- (2) 本產品是使用玻璃所製，在使用觸控面板時，請注意不要施加強力衝擊。
Do not put a heavy shock or stress on touch panel.
- (3) 拿起觸控面板時請勿從 FPC 拿取。
Do not lift Touch Panel by cable (FPC).
- (4) 在 FILM 面處請勿施加重力。(例: 在組裝時從 FILM 吸取移動)
Do not add any stress only film face.
(Ex. Don't transfer the panel by film face with vacuum)
- (5) 表面清潔時，請使用「乾的柔性布」或「浸泡過中性清潔液擰乾的布」或「沾有酒精的柔性布」。請勿使用有機溶劑、酸、鹼類溶劑。
Pls. use dry cloth or soft cloth with neutral detergent (after wring dry) or one with ethanol at cleaning. Do not use any organic solvent, acid or alkali solution.
- (6) 保存時請勿重疊放置。特別是請勿用重物壓著。
Do not pile Touch Panel. Do not put heavy goods on Touch Panel.
- (7) FPC 請勿折彎，有可能使迴路線斷裂。特別是對於連結器的插入部分，因為貼有補強板，在插入連結器時請勿施加過多的力量。請避免以下圖方式插入。
Do not bend a cable of Touch Panel for prevent happen to line cut failure.
Please don't use following method for insert the cable to connector.

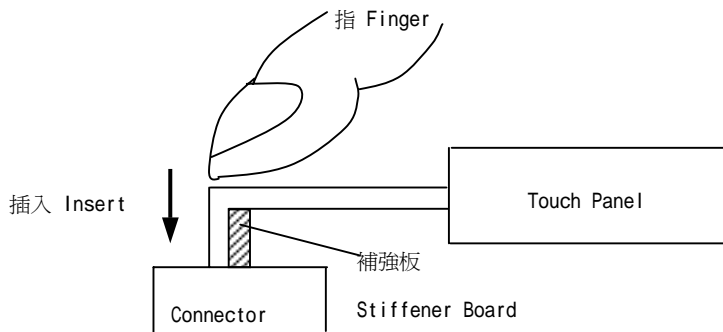

(8) 在實際組裝設計時，請注意以下事項。

DOCUMENT CONTROL SECTION


DATE

04	20050824	崔岱安		Change to lead free	TITLE: TOUCH PANEL SPEC.	
03	20040528	郭信杰		外觀仕様變更	DRAW NO. Tech Bes TTI-03017	CUST
02	20040427	郭信杰		玻璃缺角規範變更 松田		
EDIT	DATA	DESIG	CHECK	DESCRIPTION	富晶通科技股份有限公司	
DESIGN	20030425	陳致富	CHECK	APPR 松田	TRANSTOUCH TECHNOLOGY INC	SHEET 11/14

Please pay attention for the matter as stated below at mounting design of touch panel & enclosure

- 1. 觸控面板的上蓋支撐物請設定在透明範圍的外側。
(上蓋請勿壓在透明範圍上，會有誤動作的情況發生)
Enclosure support to fix touch panel must be out of view (transparent) area.
(Do not design enclosure presses the view area to protect from miss input)
- 2. 上蓋的外框請設定在透明範圍的內側、動作保證範圍的外側。
(上蓋的外框請勿接觸到透明範圍)。
Enclosure edge must be between view area & Guaranteed active area.
(Enclosure edge must not touch with view area)
- 3. 觸控面板上下部的壓合，請以橡膠等彈性材質。
We recommend the material of support to fix touch panel is elastic material.
- 4. 使用時，觸控面板的上面(FILM)請勿與上蓋黏著固定。
Do not bond top surface (film) of touch panel with enclosure.
- 5. 觸控面板上部的邊角，因為玻璃導電層有傳導性，在組裝設計時請注意不要與金屬材質接觸。
The corner parts (fig.*) has conductivity. Do not touch any metal part after mounting.
- 6. 有防水需求時，請考慮用橡膠等材質對迴路週邊做防水。
Special design is required for water resistance use.

【實裝構造例 Mounting condition example】

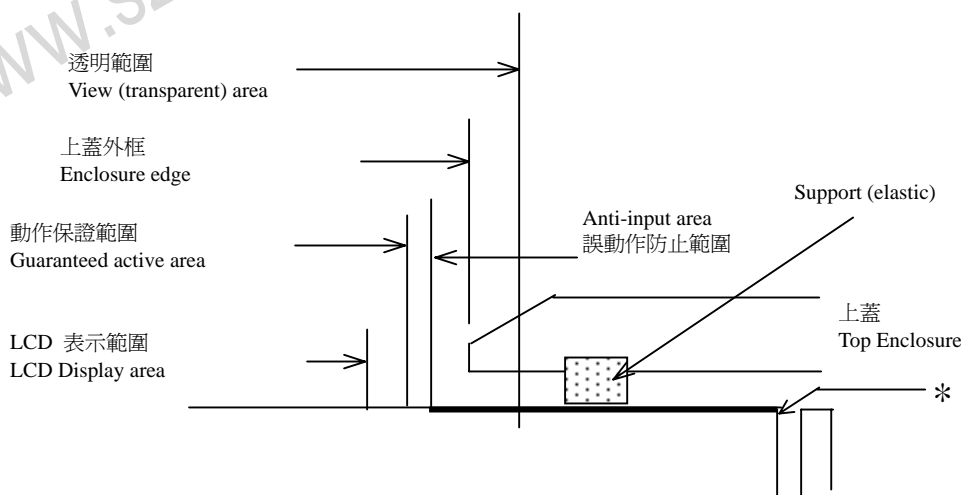


DOCUMENT CONTROL SECTION
DATE


04	20050824	崔岱安		Change to lead free	TITLE: TOUCH PANEL SPEC.	
03	20040528	郭信杰		外觀仕様變更	DRAW NO. Tech Bes TTI-03017	CUST
02	20040427	郭信杰		玻璃缺角規範變更 松田		
EDIT	DATA	DESIG	CHECK	DESCRIPTION	富晶通科技股份有限公司	
DESIGN	20030425	陳致富	CHECK	APPR 松田	TRANSTOUCH TECHNOLOGY INC	SHEET 12/14

10. 包裝型式 Packing Method : ④
 如圖 as drawing

觸控面板裝入清潔袋內
 Touch panel in a clean bag

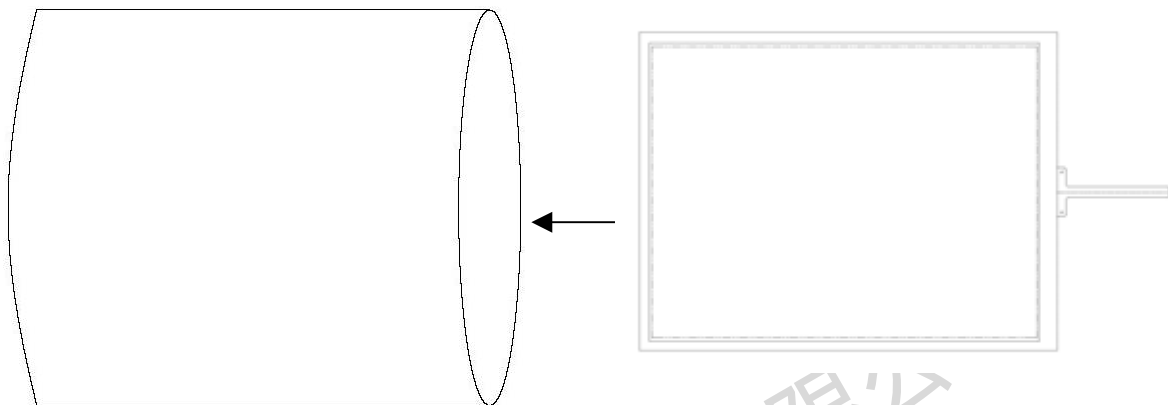

裝入包裝箱內(Put in carton)

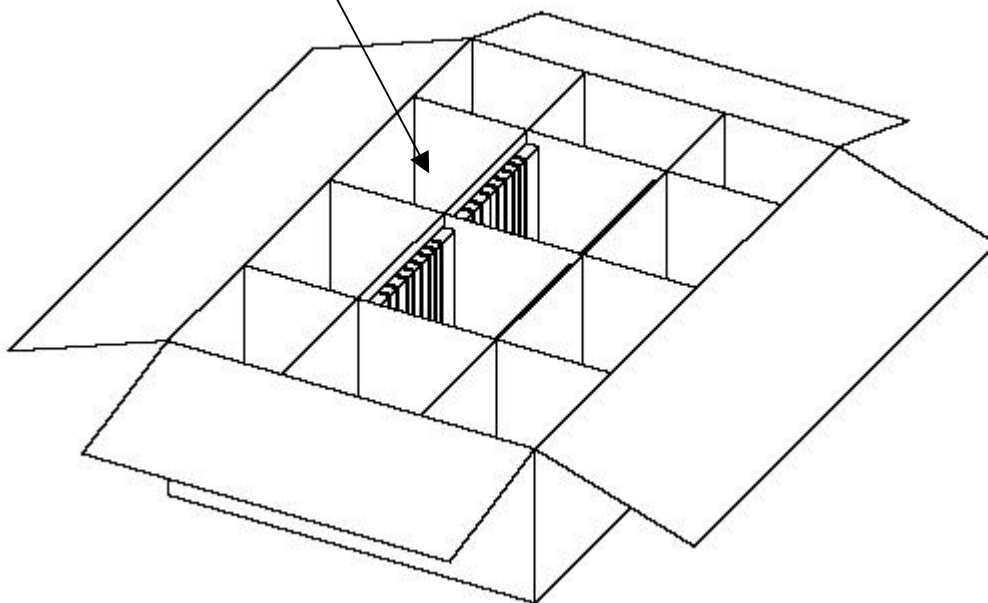

1 個裝滿的包裝箱內含 52 片觸控面板
 A full carton with 52 pieces of touch panels

DOCUMENT CONTROL SECTION

DATE

04	20050824	崔岱安		Change to lead free	TITLE: TOUCH PANEL SPEC.	
03	20040528	郭信杰		外觀仕様變更	DRAW NO. Tech Bes TTI-03017	CUST
02	20040427	郭信杰		玻璃缺角規範變更 松田		
EDIT	DATA	DESIG	CHECK	DESCRIPTION	富晶通科技股份有限公司	
DESIGN	20030425	陳致富	CHECK		TRANSTOUCH TECHNOLOGY INC	SHEET 13/14

A


包裝箱外側兩邊以圖章打印綠色『RoHS』字樣 ④

Two Green RoHS marks Stampared on both sided of one full carton

B

RoHS

④

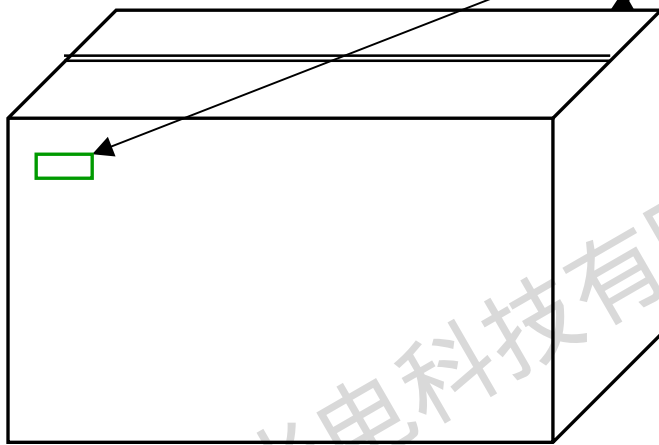

C

D

www.szlongsun.net 深圳市长盛威光电科技有限公司

DATE	DOCUMENT CONTROL SECTION
	↑

04	20050824	崔岱安		Change to lead free	TITLE: TOUCH PANEL SPEC.	
03	20040528	郭信杰		外觀仕様變更	DRAW NO. Tech Bes TTI-03017	CUST
02	20040427	郭信杰		玻璃缺角規範變更 松田		
EDIT	DATA	DESIG	CHECK	DESCRIPTION	富晶通科技股份有限公司	
DESIGN	20030425	陳致富	CHECK		APPR	松田
					TRANSTOUCH TECHNOLOGY INC	SHEET 14/14

